


High Wall Pearl



2.0/2.5/3.5/5.0/6.8 kW

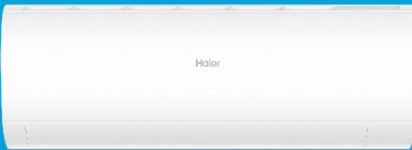

YR-HE



Easy installation



WiFi control



Canda plus airflow



Self-clean



Model	Indoor Unit		AS20PBAHRA	AS25PBAHRA	AS35PBAHRA	AS50PDAHRA	AS68PDAHRA
Capacity	Nominal cooling	kW	2.00	2.60(0.80~3.00)	3.20(0.80~3.60)	5.00(1.30~5.80)	6.80(2.20~8.50)
	Nominal heating	kW	2.50	2.80(0.80~3.20)	3.40(0.80~4.20)	5.20(1.40~6.00)	6.80(2.40~9.50)
Electrical Parameters	Power supply	Ph/V/Hz	1/220~240/50	1/220~240/50	1/220~240/50	1/220~240/50	1/220~240/50
Performance	Air flow (H)	m³/h	550	550	600	900	1100
	Sound power level (H)	dB(A)	54	54	56	57	62
	Sound pressure level (H/M/L)	dB(A)	37/32/28	37/32/28	37/33/29	44/40/35	47/45/37
Installation	External dimensions (W/D/H)	mm	805/200/290	805/200/290	805/200/290	975/220/320	975/220/320
	Shipping dimensions (W/D/H)	mm	874/270/363	874/270/363	874/270/363	1090/316/413	1050/301/397
	Net/Shipping weight	kg	8.3/10.5	8.3/10.5	8.3/10.5	11.6/14.4	11.6/14.4
	Refrigerant liquid pipe	mm	6.35	6.35	6.35	6.35	6.35
	Refrigerant gas pipe	mm	9.52	9.52	9.52	12.70	12.70
	Controller	standard	YR-HE	YR-HE	YR-HE	YR-HE	YR-HE
		optional	/	/	/	/	/

*Data is pending;